


GSW815P

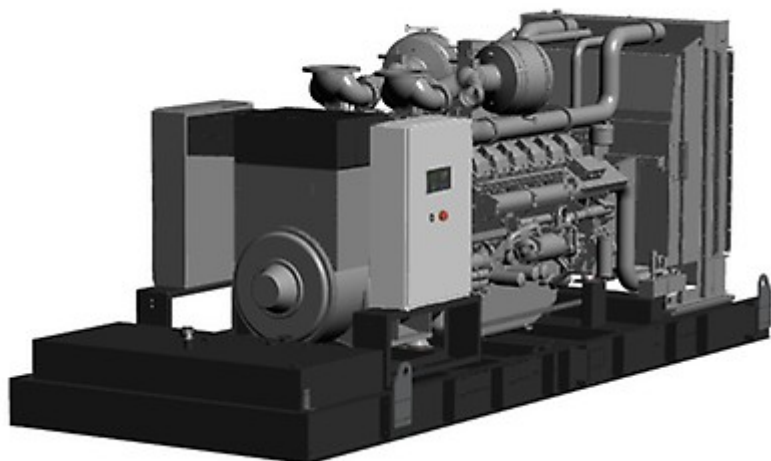

Main Features

| | | |
|--------------|------------|-----|
| Frequency | Hz | 50 |
| Voltage | V | 400 |
| Power factor | cos ϕ | 0.8 |
| Phase | | 3 |

Power Rating

| | | |
|-------------------|-----|--------|
| Standby power LTP | kVA | 826.18 |
| Standby power LTP | kW | 660.94 |
| Prime power PRP | kVA | 751.29 |
| Prime power PRP | kW | 601.03 |

Ratings definition (According to standard ISO8528 1:2005)

PRP - Prime Power:

It is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output over 24 h of operation shall not exceed 70 % of the prime power.

LTP - Limited-Time running Power:

It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 h of operation per year (whose no more than 300 for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. No overload capability is available.

Engine specifications

| | | |
|-------------------------------------|--------------------------|-------|
| Engine manufacturer | Perkins | |
| Model | 4006-23TAG2A | |
| Version | 50 Hz | |
| [50Hz] Exhaust emission level | Unregulated | |
| Engine cooling system | Water | |
| Nr. of cylinder and disposition | 6 in line | |
| Displacement | cm ³ | 22921 |
| Aspiration | Turbocharged aftercooled | |
| Speed governor | Electronic | |
| Operating Speed-Nominal | rpm | 1500 |
| Prime gross power PRP | kW | 658 |
| Maximum gross power LTP | kW | 721 |
| Oil capacity | l | 113.4 |
| Lube oil consumption @ PRP (max) | % | 0.5 |
| Coolant capacity | l | 105 |
| Fuel | Diesel | |
| Specific fuel consumption @ 75% PRP | g/kWh | 211 |
| Specific fuel consumption @ PRP | g/kWh | 209 |
| Starting system | Electric | |
| Starting engine capability | kW | 7.5 |
| Electric circuit | V | 24 |

Fuel system:

- Direct fuel injection system , fuel lift pump
- Fuel cooler
- Closed fuel system

Lube oil system:

- Low oil pressure switch
- Wet sump with filler and dipstick
- Lubrication oil filters
- Oil cooler with separate filter header

Combustion air system:

- Exhaust turbochargers
- Set of dry-type air filters with contamination indicator
- Intake air depression (max at fuel power) : 22 mbar

Cooling system:

- High coolant temperature switch
- Twin thermostats, water pump
- System designed for ambient up 50°C
- Radiator incorporating air-to-air charge cooler



Alternator Specifications

| | | |
|---------------------------|------------|------|
| Alternator | Mecc Alte | |
| Model | ECO43-1S | |
| Voltage | V | 400 |
| Frequency | Hz | 50 |
| Power factor | cos ϕ | 0.8 |
| Voltage regulation system | Electronic | |
| Poles | 4 | |
| Type | Brushless | |
| Standard AVR | DER1 | |
| Voltage tolerance | % | 1 |
| Efficiency @ 75% load | % | 95.3 |
| Class | H | |
| IP protection | 23 | |
| Phases | 3 | |



Mechanical structure

Robust mechanical structure which permits easy access to the connections and components during routine maintenance check-ups.

Voltage regulator

Voltage regulation with DER 1. The digital DER 1 is a Digital controlled regulator, based on DSP (Digital Signal Processor) that combines function as Voltage Regulation and Alternator Protections and Diagnostic into a very small single board.

Voltage supply: 40Vac÷270Vac

Maximum continuous output current: 4Adc

Frequency range: 12Hz÷72Hz

Single phase sensing automatic recognition

Average value of voltage regulation

Voltage regulation range (sensing) from 75Vac to 300Vac

Precision of voltage regulation: $\pm 1\%$ from no-load to nominal load in static condition, with any power factor and for frequency variations ranging from -5% to +20% of the nominal value.

Precision of voltage regulation: $\pm 0,5\%$ in stabilized conditions (load, temperature).

Transient voltage drop and overvoltage within $\pm 15\%$

Voltage recovery time within $\pm 3\%$ of the value set, in less than 300 msec.

Underspeed protection with adjustable threshold and slope

Overvoltage and undervoltage alarms

Excitation overcurrent protection with delayed intervention

Alarm conditions storage (type of alarm, number of events, duration of the last event, total time)

Memorization of the regulator operation time

Windings / Excitation system

Generator stator is wound to 2/3 pitch. This eliminates triple (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches. MAUX (Standard): The MAUX MeccAlte Auxiliary Winding is a separate winding within the main stators that feeds the regulator. This winding enables to take an overload of 300% forced current (short circuit maintenance) for 20 seconds. This is ideal for motor starting requirements. PMAUX (optional): Alternator can be equipped with the optional PMAUX (Permanent Magnet Generator) which matches the performance and is capable of supporting both linear and distorted loads.

Insulation / Impregnation

Insulation is of class H standard. Impregnation is made with premium tropicalised epoxy resins by dipping and dripping. High voltage parts are impregnated by vacuum, so the insulation level is always very good. In the high-power models, the stator windings undergo a second insulation process. Grey protection is applied on the main and exciter stator to give enhanced protection.

Reference standards

Alternator manufactured according to , and complies with , the most common specification such as CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530, BS 4999-5000, CAN/CSA-C22.2 No14-95-No100-95



Genset equipment

BASE FRAME:

Base frame made of welded steel profiles, complete with anti-vibration mountings properly sized.

The baseframe has a grounding point to connect all metal parts of the generating set and it provides a high structural strength.

ENGINE COMPLETE WITH:


- Liquids (no fuel)
- Manual oil Draining pump

PROTECTIONS:

- Moving and rotating parts protection against accidental contacts



LIFTING:

- Lifting points frame structure.

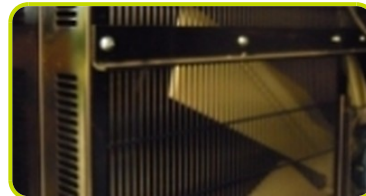


Genset Equipment - Basic Configurations Available:

| | | | |
|--|-------|--|--------|
| BAT – LEAD-ACID STARTING BATTERIES KIT | | | : |
| Battery | n | | 2 |
| Battery Capacity | Ah | | 155 |
| MBS - Manual Battery Switch | | | • |
| EXHAUST SILENCER - VERSIONS AVAILABLE | | | : |
| IES - Industrial silencer | dB(A) | | -15 |
| RES - Residential silencer | dB(A) | | -35/38 |
| FEC - Flexible Exhaust Compensator Bellow and flanges | | | • |
| Hot parts protection | | | • |
| INTEGRATED FUEL TANK - VERSIONS AVAILABLE | | | : |
| IFT1 - Integrated Fuel Tank (steel) | l | | 500 |
| IFT2 - Integrated Fuel Tank (steel) | l | | 1000 |
| FBD - Fully bunded base frame | | | • |
| LDS - Leakage detection sensor (only with FBD) | | | • |
| FCV - Fuel Cut Off Valve | | | • |
| AFP - Automatic Fuel Pump | | | • |
| DFP - Double Automatic Fuel Pump | | | • |
| PHS - Coolant Pre-Heating System - available for models: | | | • |
| ALS - Automatic Lube Oil Top Up System with lube oil tank 100L | | | • |
| [•] = Supplement available | | | Select |
| Other Configurations and-or special versions available on requests | | | . |

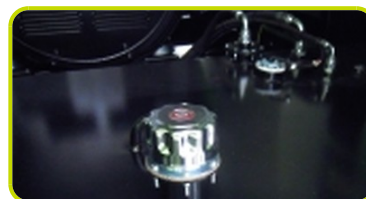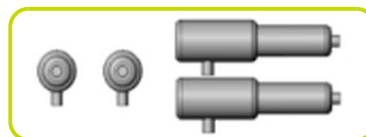

Dimensional data

| | | |
|------------|--------|------|
| Length | (L) mm | 3900 |
| Width | (W) mm | 1950 |
| Height | (H) mm | 2325 |
| Dry weight | Kg | 6641 |

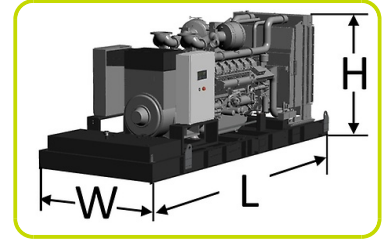

Consumption

| | | |
|-----------------------------|-----|--------|
| Fuel consumption @ 75% PRP | l/h | 125.34 |
| Fuel consumption @ 100% PRP | l/h | 163.72 |

Installation data

| | | |
|-------------------------------|---------------------|---------|
| Total air flow | m ³ /min | 1350.00 |
| Exhaust gas flow @ PRP | m ³ /min | 180 |
| Exhaust gas temperature @ LTP | °C | 430 |

Electrical Data

| | | |
|------------------|----|---------|
| Battery capacity | Ah | 155 |
| MAX current | A | 1192.52 |
| Circuit breaker | A | 1250 |

Control panel availability

| | |
|-------------------------|-----|
| AUTOMATIC CONTROL PANEL | ACP |
| MODULAR PARALLEL PANEL | MPP |

ACP - Automatic control panel

Mounted on the genset, complete with digital control unit for monitoring, control and protection of the generating set

DIGITAL INSTRUMENTATION

- Generating set voltage (3 phases)
- Mains voltage
- Generating set frequency
- Generating set current (3 phases)
- Battery voltage
- Power (kVA - kW - kVAr)
- Power factor Cos ϕ
- Hours-counter
- Engine speed r.p.m.
- Fuel level (%)
- Engine temperature

COMMANDS AND OTHERS

- Four operation modes: OFF - Manual starting - Automatic starting - Automatic test
- Pushbutton for forcing Mains contactor or Genset contactor
- Push-buttons: start/stop, fault reset, up/down/page/enter selection
- Remote starting availability
- Acoustic alarm
- Automatic battery charger
- USB Communication port
- Settable PASSWORD for protection level

PROTECTIONS WITH ALARM

- Engine protections: low fuel level, low oil pressure, high engine temperature
- Genset protections: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage

PROTECTIONS WITH SHUTDOWN

- Engine protections: low fuel level, low oil pressure, high engine temperature
- Genset protection: under/over voltage, overload, under/over battery voltage, battery charger failure



ACP - Basic Configurations Available:

| POWER PANEL - BREAKERS AVAILABLE: | | |
|--|---|----------|
| GCB1 - Genset Circuit Breaker 3-pole | A | 1250 |
| GCB2 - Genset Circuit Breaker 4-pole | A | 1250 |
| ETB - External Terminal Board (with GCB) | | Standard |
| Various Supplement for Remote Control | | RGW [●] |
| Various supplements for remote signals | | ARM [●] |
| Control Panel Anti-Condensation Heater (ACP) | | CAH [●] |
| Other Configurations and-or special versions available on requests | | |



MPP - Modular parallel panel

Mounted on the genset, complete with digital control unit for monitoring, control, protection and load sharing for both single and multiple gen-sets operating in standby or parallel modes (up to 32 gen-sets in island).

DIGITAL INSTRUMENTATION (5" TFT COLOUR SCREEN)

- Mains: voltage, Intensity, Frequency.
- Mains kW - kVAr - Power factor Cos f.
- Generating set voltage (3 phases).
- Generating set frequency.
- Generating set current (3 phases).
- Generating set Power (kVA - kW - kVAr - Cos f).
- Generating set kWh and kVAh.
- Battery voltage.
- Hours-counter.
- Engine speed r.p.m.
- Fuel level (%).
- Engine temperature - Oil pressure



COMMAND AND OTHERS

- Single Parallel to Mains and Multiple parallel genset Island applications
- Operation modes: OFF- MAN - AUTO - TEST
- Pushbutton for forcing Mains Breaker/contactator or Genset Breaker/contactator.
- Push-buttons: start/stop, fault reset, up/down/page/enter selection.
- Multiple parallel and Power Management operation available.
- Automatic synchronizing and power control (via speed goveroner or ECU)
- Baseload Import/Export and Peak shaving
- Voltage and PF control.
- Configurable digital I/O (8/8) and analogue inputs (4).
- Integrate PLC programmable functions.
- Event-based history (up to 500records).
- Remote starting and Blocking signal availability.
- Acoustic alarm.
- Automatic battery charger.
- Ethernet RJ45, USB A, USB B and RS485 Communication ports.
- Multi-pin connettor (in and out) for parallel with other generators



PROTECTION

- Engine protections: low fuel level, low oil pressure, high engine temperature.
- Genset protections: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage
- Others: overcurrent, shortcircuit, reverse power.
- Emergency stop button.

MPP - Basic Configurations Available:

| POWER PANEL - BREAKERS AVAILABLE: | | |
|--|---|----------|
| GMB1 - Genset Circuit Breaker 3-pole motorized | A | 1250 |
| GMB2 - Genset Circuit Breaker 4-pole motorized | A | 1250 |
| ETB - External Terminal Board (with GMB) | | Standard |
| Various Supplement fof Remote Control | | • |
| Various supplements for remote signals | | • |
| Control Panel Anti-Condensation Heater (MPP) | | • |
| [•] = Supplement available | | . |
| Other Configurations and-or special versions available on requests | | . |



Accessories

Items available as accessory equipment


LTS - Load Transfer Switch [Accessories for ACP Automatic Control Panel]

The Load Transfer Switch (LTS) panel operates the power supply changeover between the generator and the Mains in backup applications, guarantying the feeding to the load within a short period of time.

It consists of a standalone cabinet which can be installed separate from the generating set. The logic control of the power supply changeover is operated by means of the Automatic Control Panel (ACP) mounted on the generating set, so therefore none logic device is required on the LTS panel.

LTS Type ATyS_D:

- Box type: steel enclosures
- Installation mode: Standing
- Door: Hinged door closed with double barb locking.
- Ingress Protection: IP43
- Gland Plates: Removable on the top & bottom side
- Connections: Bottom/Bottom
- Motor unit
- Gland Plates: Removable on the top & bottom side
- Connections: Bottom/Bottom
- Motor unit
- Switch position indicator
- Auto/Manual cover selector
- Housing for manual handle
- Padlocking mechanism
- Two side by side mounted load break switches
- Poles 4
- Double coils self-powered
- Voltage (coils): 208/277VAC (Tolerance +/-20% 166/333VAC)
- Frequency 50 & 60HZ
- Interface ATyS D10, fixed on the door for the status indication: Two lights to indicate the voltage presence of the grid and the diesel generator; Two lights for the switch position; Functionality mode (auto/manual) and cover protection IP65.
- Compliant with IEC 60947-3, EN 61439-6-1 and GB 14048-11

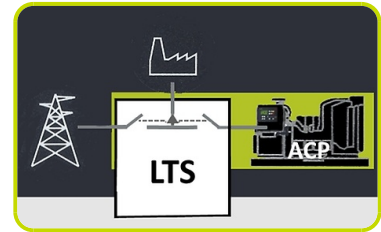

LTS SUPPLEMENTS AVAILABLE ON REQUEST:

- **ESB** - Emergency Stop Button (installed on the panel front)
- **APP** - Additional IPXXB Protection (internal plexiglass)

The information is aligned with the Data file at the time of download. Printed on 23/05/2021 (ID 379)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

